



EU-ADP-U120S 系列概述

一. 电源规格:

电源型号 (MODEL)	输入(VAC)	输出 (VDC)	保 护 功 能 (PROTECTION)	尺寸 (SIZE) MM
EU-ADP-U120S12	110-240VAC	12V/8.3A	SCP/OCP/OVP	135mm*65mm*36.5mm
EU-ADP-U120S19	110-240VAC	19V/5.2A	SCP/OCP/OVP	135mm*65mm*36.5mm
EU-ADP-U120S24	110-240VAC	24V/4.2A	SCP/OCP/OVP	135mm*65mm*36.5mm
EU-ADP-U120S48	110-240VAC	48V/2.5A	SCP/OCP/OVP	135mm*65mm*36.5mm

二. 系列特性:

Features:

AC input 110-240VAC

Miniature

Protections: SCP /OCP/ OVP/ OTP

High efficiency, high reliability

100% full load burn-in test

1 years warranty


三. 产品外观:




net weight: 400g

四. 工作温度，输出功率曲线以及负载曲线图：

Temperature- load curve

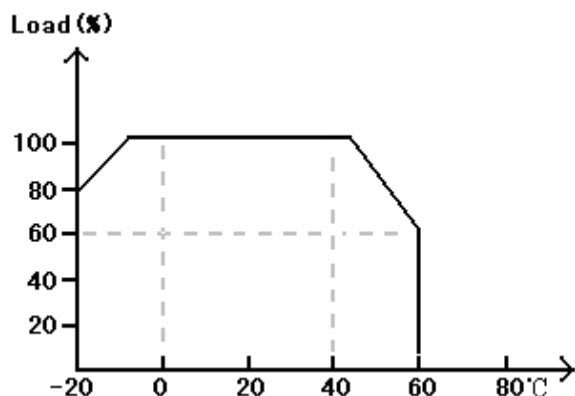

Input voltage- load curve

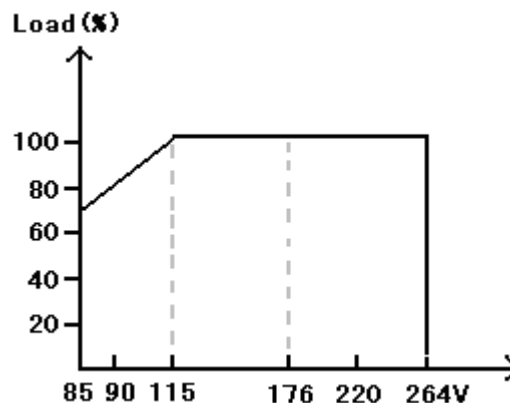

五. 测试标准：

EMC DATA:

1、 EMI

RE/CE	EN55022 CLASS B
Harmonics Current	EN61000-3-2


2、 EMS

ESD	EN61000-4-2	Air:8KV Contact:4KV	Criteria A
RS	EN61000-4-3	80MHz~1GHz 3V/m	Criteria A
EFT	EN61000-4-4	5KHz AC=1KV	Criteria A
Surge Test	EN61000-4-5	1.2/50us AC:±2KV 8/50us	Criteria A
CS	EN61000-4-6	0.15MHz-80MHz 3V/m	Criteria A
Voltage dips	EN61000-4-8	30% 10ms 60% 100ms >95% 5000ms	Criteria A
Power Frequency Magnetic Field	EN61000-4-11	50Hz 30A/m	Criteria A
RF Electromagnetic Field pulse modulated	ENV50204	900±5MHz 200Hz 3V/m, 50%Duty cycle	Criteria A

六. 安装尺寸:


build in dimension

unit: mm

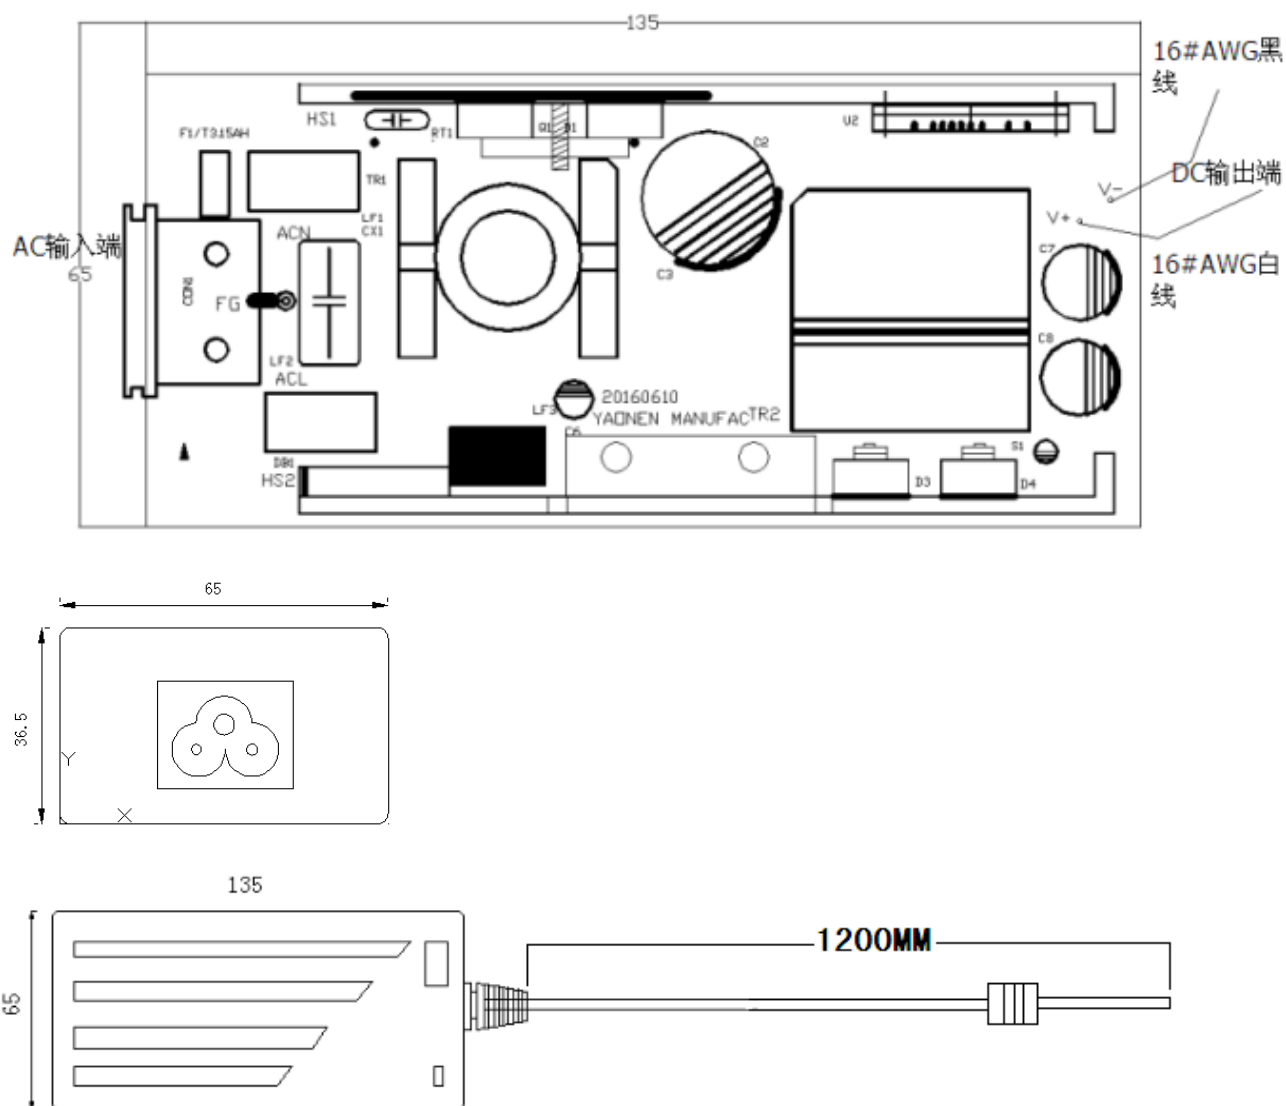


Connection

OUTPUT: $\Phi 2.5$ plugs



七. 标签:

Spec Label

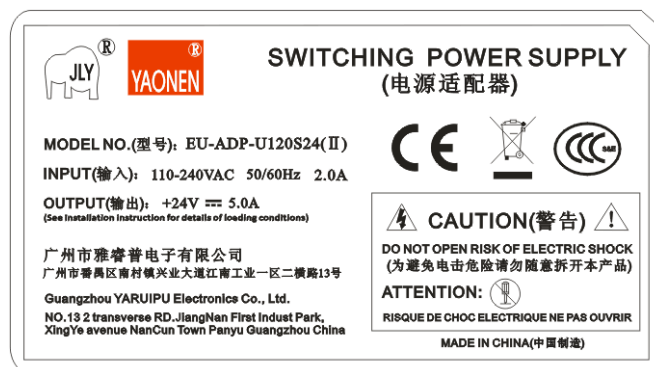

90*50M

八. 包装:

